

æ
e-ssential

THE ELEMENTARY COLLECTION




e-ssential

THE ELEMENTARY COLLECTION

The one place that we find everything essential
to our existence, is **nature**.

An oasis of inspiration and comfort, *e-ssential* introduces
five carpet styles made with **100% PA solution-dyed fibre**.
Providing **excellent lightfastness**, *e-ssential* is a durable and
environmentally-friendly choice, especially in areas
exposed to strong sunlight.

What's more; *e-force*, *e-major*, *e-grid*, *e-rock*, *e-weave* and *e-touch*
feature impressive stain-resistance and are easy to maintain.
Easy to clean, strong and comfortable, this carpet collection is
an **elementary choice** for commercial spaces.

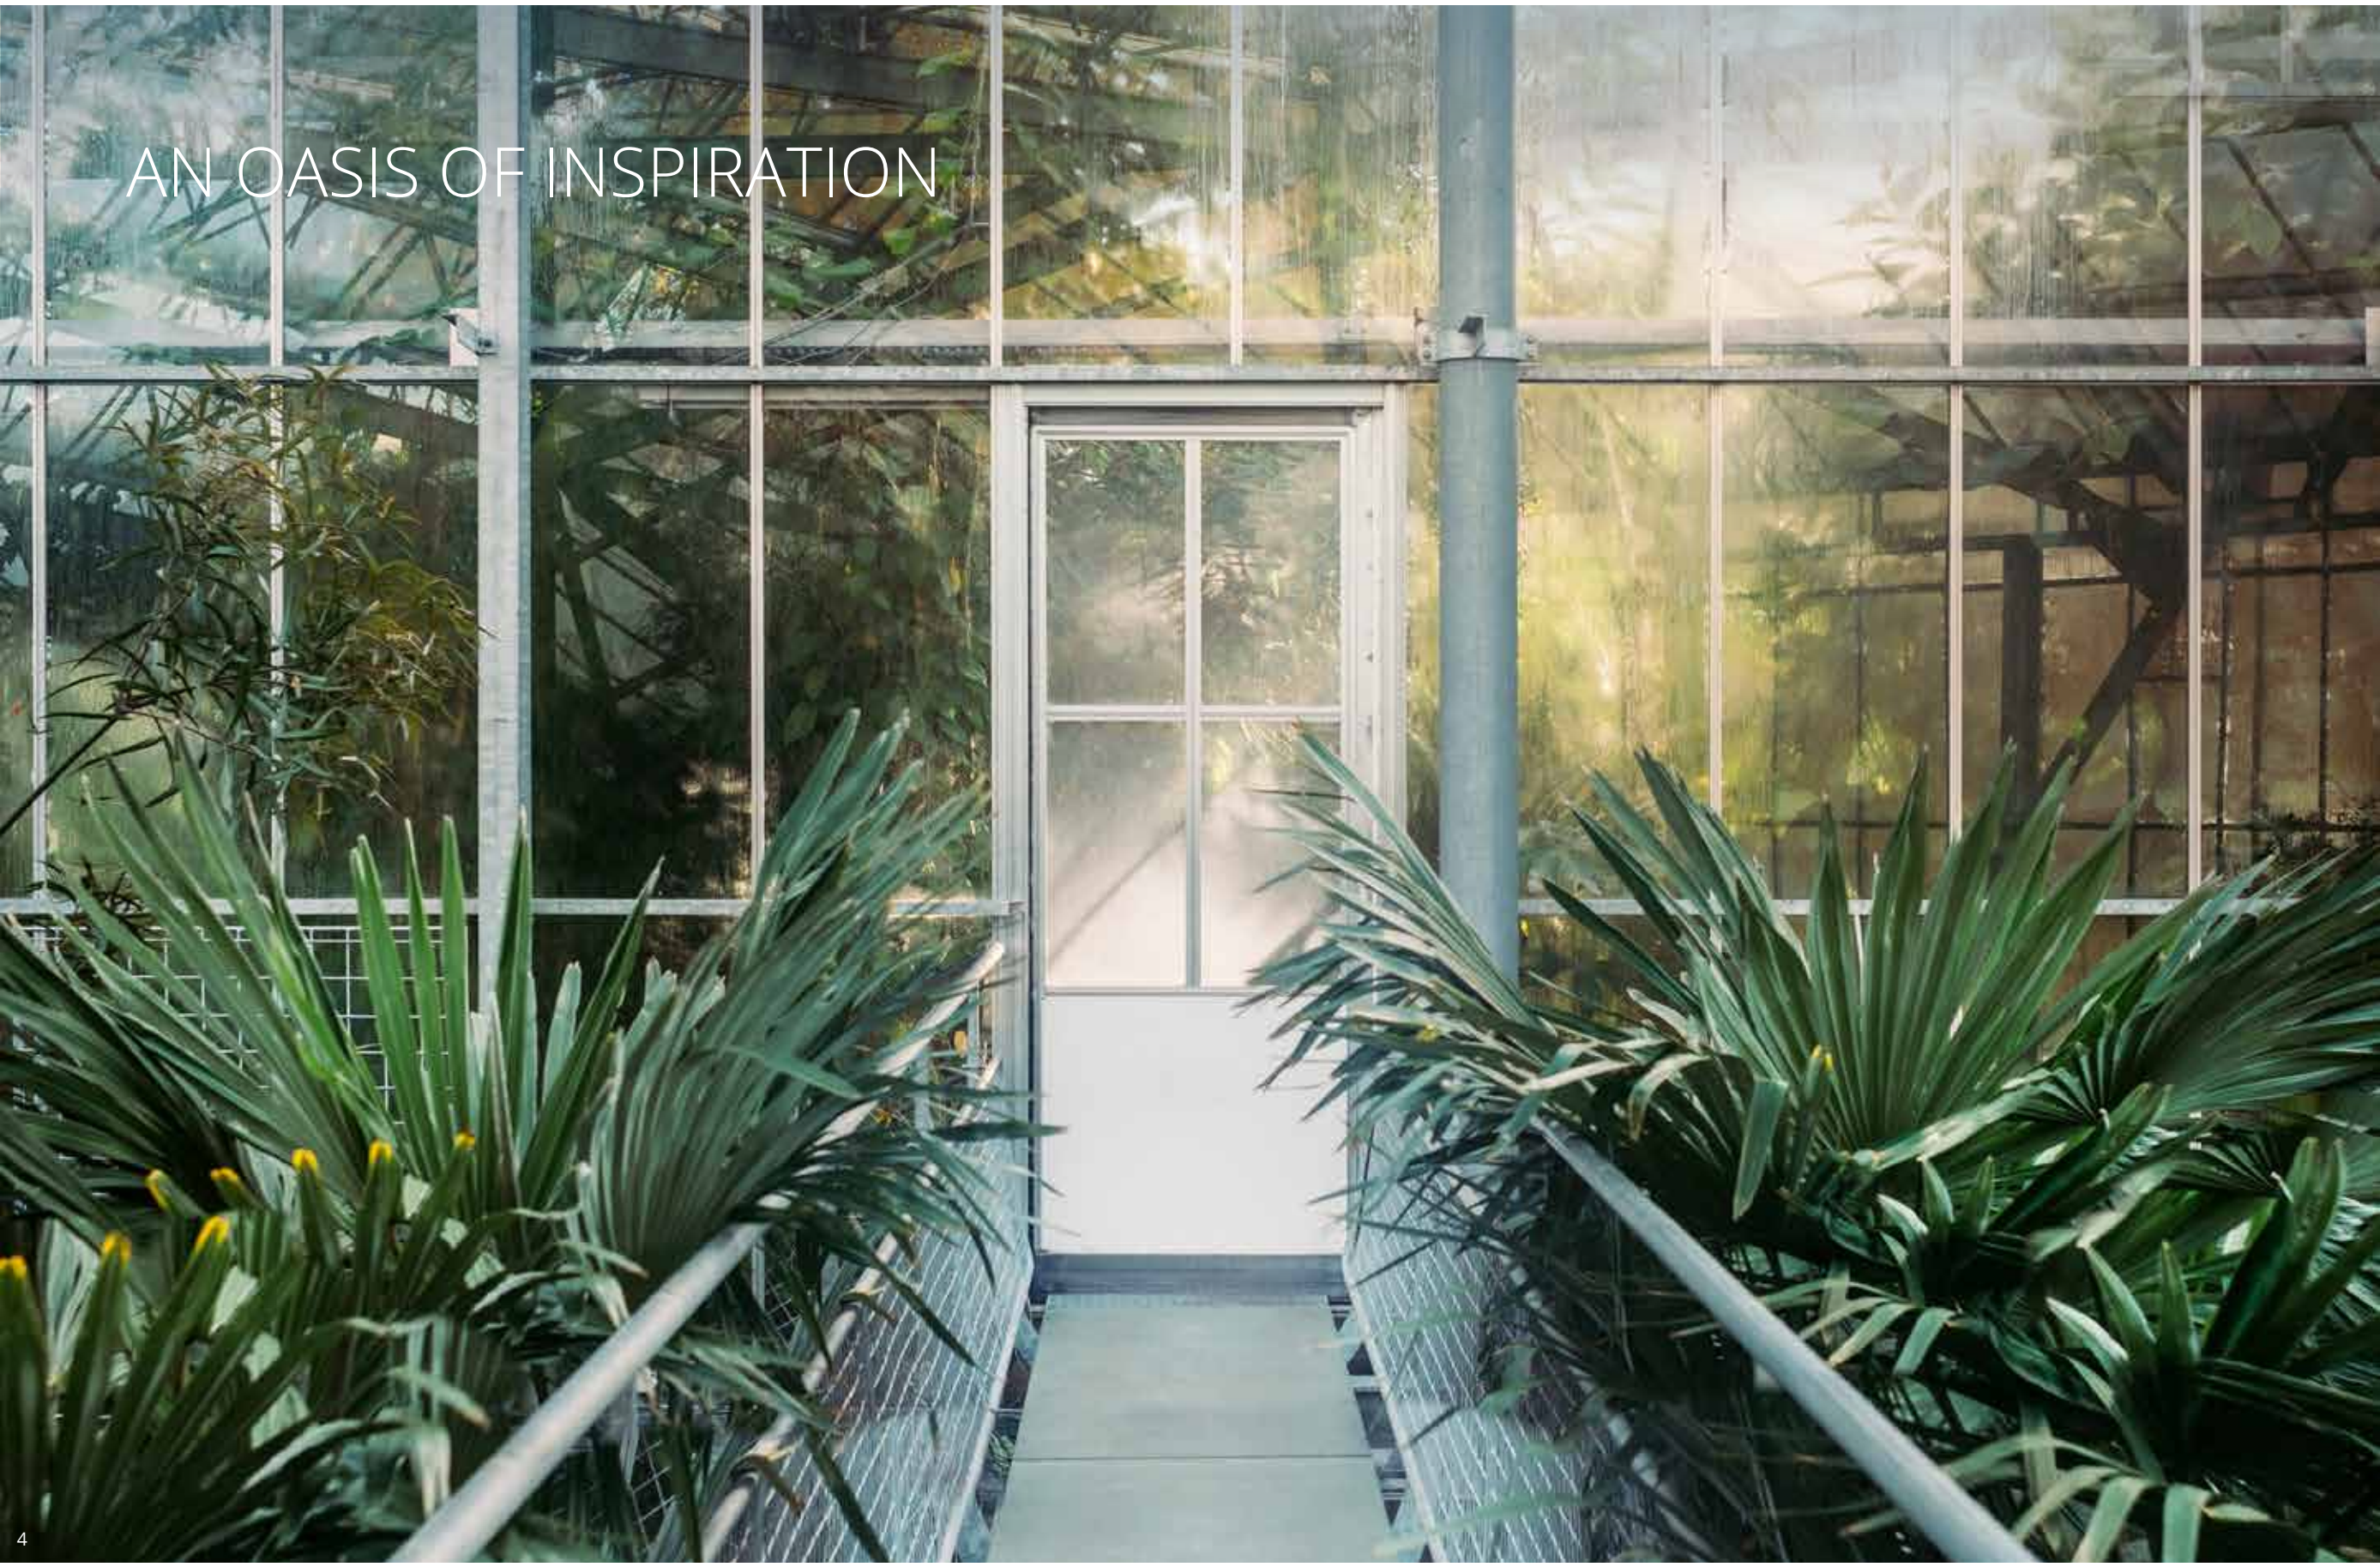

AN OASIS OF INSPIRATION

Index

1/ <i>e-force</i>	6
2/ <i>e-major</i>	12
3/ <i>e-grid</i>	18
4/ <i>e-rock</i>	24
5/ <i>e-weave</i>	30
6/ <i>e-touch</i>	36

A photograph of a waterfall cascading over moss-covered rocks in a dense forest. The water is white and frothy as it falls, surrounded by lush green moss and dense evergreen trees. The scene is captured from a slightly elevated angle, looking down into the gorge.

e-force

1/ ***e-force***

A deep and inviting twist pile carpet in a two-tone effect, *e-force* brings classic style to commercial spaces. With a broad range of colours that resist stains and won't fade in sunlight, *e-force* is a high-performance quality that's perfect for setting a rich and inviting mood in heavy-wear locations. Bring long-lasting luxury with the endurance of *e-force*.

e-force



e-force 96


e-force | COLOURS




e-force 38




e-force 42

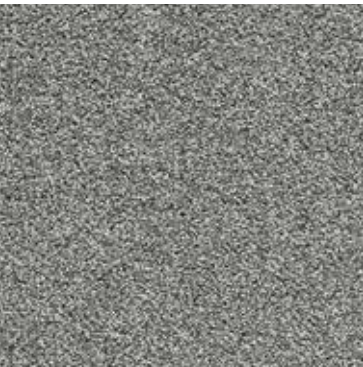


e-force 93

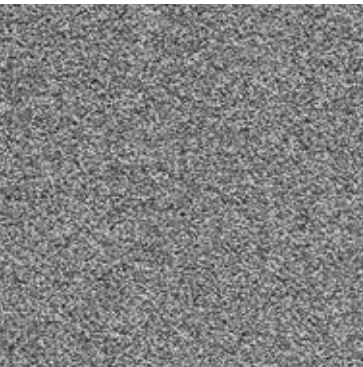

e-force 95

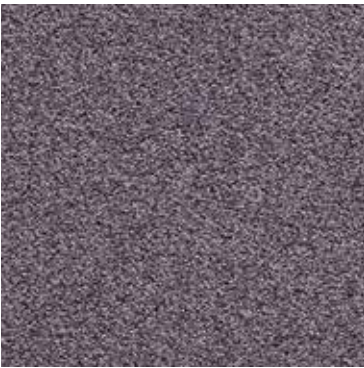

e-force 89

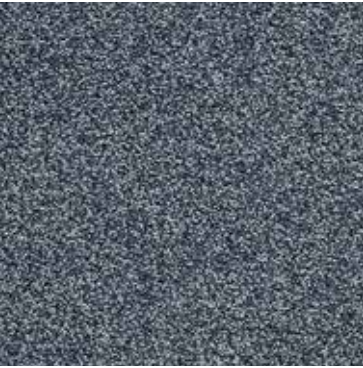


e-force 79




e-force 76



e-force 22

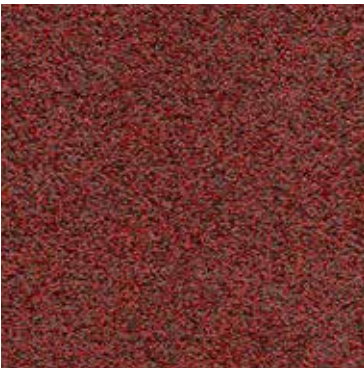

e-force 11

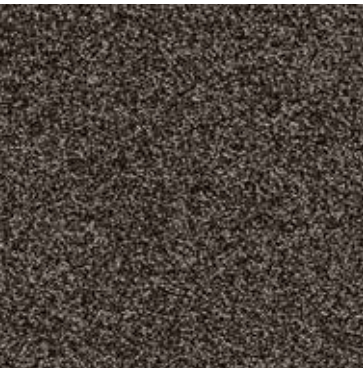

e-force 48



e-force 96



e-force 97

e-force | TECHNICAL SPECIFICATIONS

CONSTRUCTION

Tufting 1/10" twist pile

PILE MATERIAL

100% PA solution dyed

PRIMARY BACKING

Non woven PES

SECONDARY BACKING

Action Back

PILE WEIGHT

Ca. 1 270 gr/m²

TOTAL WEIGHT

Ca. 2 200 gr/m²

PILE HEIGHT

Ca. 6.7 mm

TOTAL HEIGHT

Ca. 9 mm

TUFT DENSITY

Ca. 182 000/m²

PILE DENSITY

Ca. 0.163 g/cm³

CLASSIFICATION

EN 1307

33 - LC5

CASTOR CHAIR SUITABILITY

EN 985

A: intensive use

STAIR SUITABILITY

EN 1963

A: intensive use

PERMANENTLY ANTISTATIC

ISO 6356

< 2 kV

IMPACT NOISE RATING

ISO 140-8

28 dB ΔLw

SOUND ABSORPTION

ISO 354

0.20 αw

THERMAL RESISTANCE

ISO 8302

0.113 m² K/W

FASTNESS TO LIGHT

ISO 105-B02

≥ 7

COLOUR FASTNESS TO WATER

EN ISO 105-E01

≥ 4-5

RUBBING FASTNESS

EN ISO 105-X12

≥ 4

FIRE RESISTANCE

EN 13501-1

Cfl-s1 if glued

NUMBER OF COLOURS

12

WIDTH

EN ISO 3018


ca. 400 cm



Suitable for Allergic Persons
Wall to wall carpet of allergen-tested material
3.2-2384/05



EN14041
19
Balta Industries - Kanegem-straat 15 - BE 8700 Tielt
DOP: 10111#IEOACL
Textile Floor Covering EN1307
Notified body 2401
www.baltamediabank.com





e-major

2/ ***e-major***

A level-loop pile in a subtle grain effect, *e-major* brings a contemporary aesthetic that minimises the appearance of footprints. Remarkably resistant to sunlight and easy to clean, *e-major* is an ideal fit in high-traffic areas such as hotel lobbies or airport halls. Make a lasting impression with the majestic design of *e-major*.


e-major



e-major 78



e-major 72

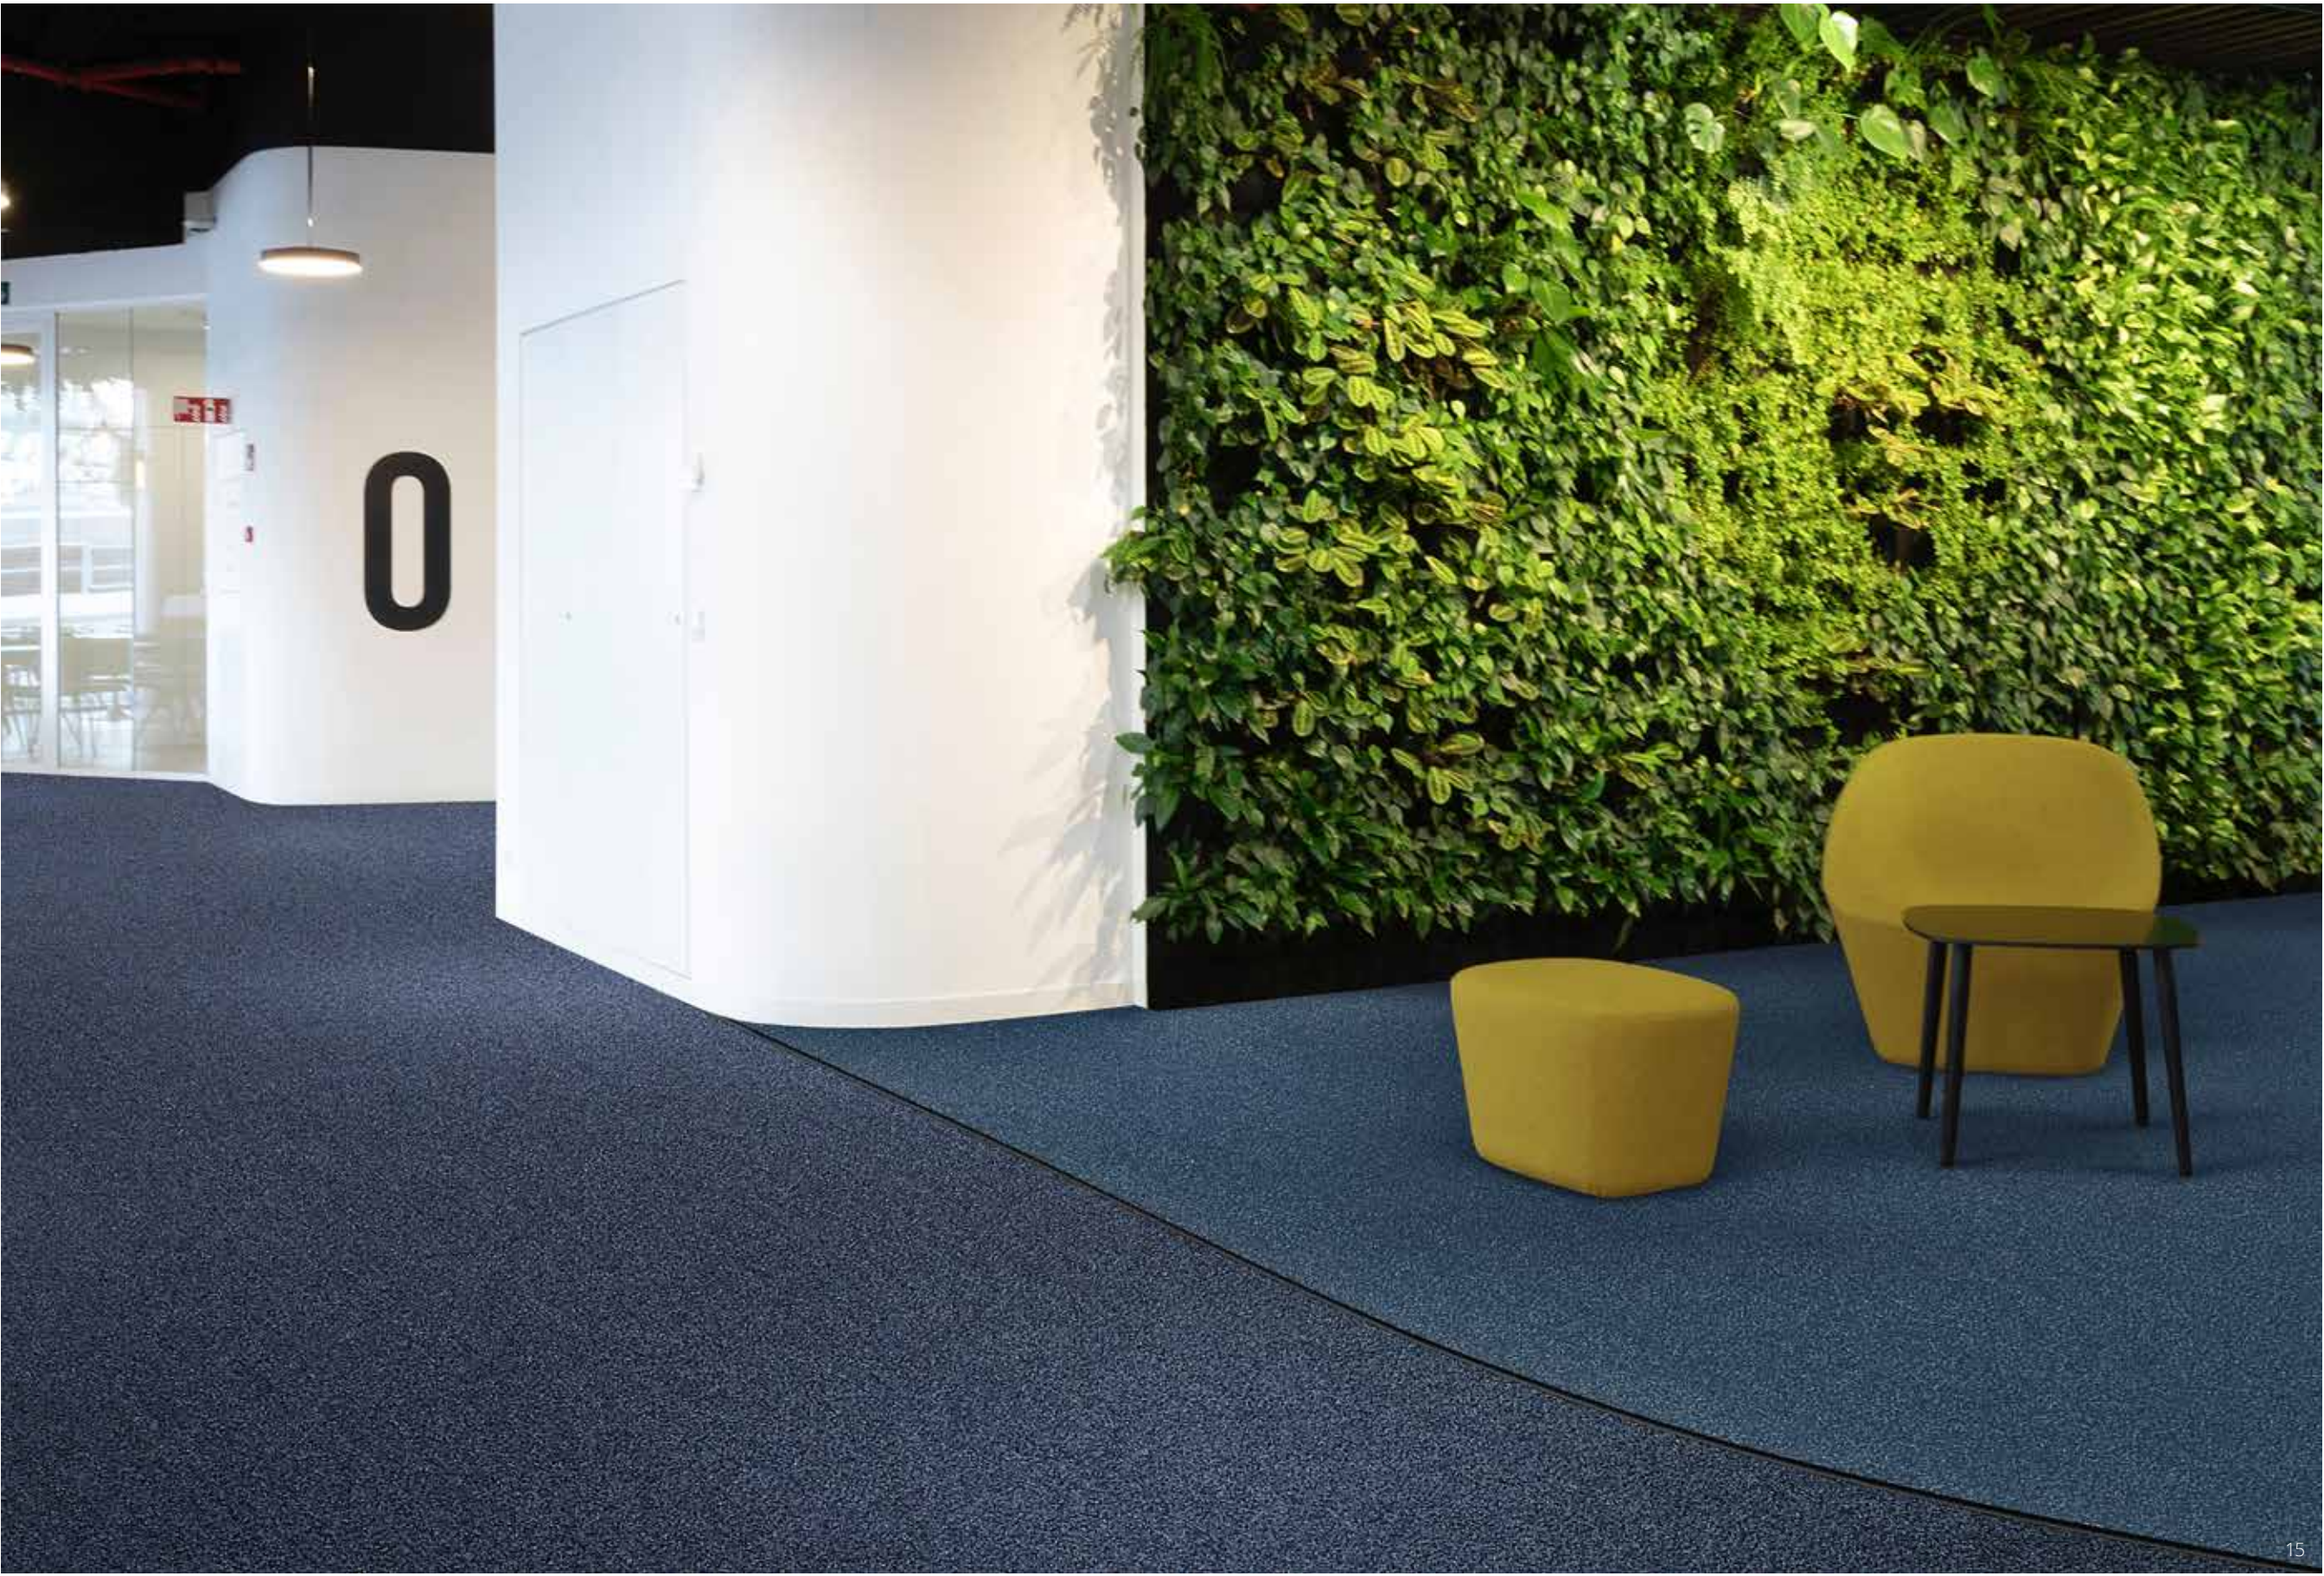

e-major | COLOURS




e-major 32



e-major 47



e-major 93

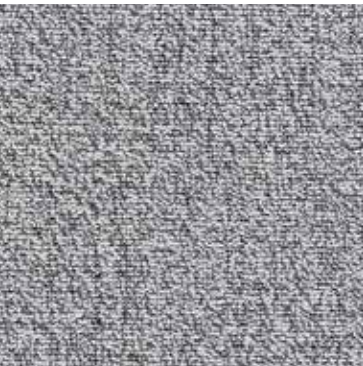

e-major 90




e-major 12



e-major 98



e-major 96

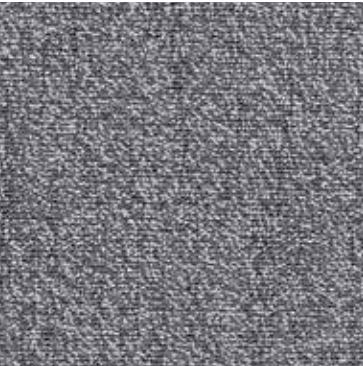

e-major 97



e-major 72



e-major 78

e-major | TECHNICAL SPECIFICATIONS

CONSTRUCTION

Tufting 1/10" textured loop

PILE MATERIAL

100% PA solution dyed

PRIMARY BACKING

Non woven PES

SECONDARY BACKING

Action Back

PILE WEIGHT

Ca. 640 gr/m²

TOTAL WEIGHT

Ca. 2 050 gr/m²

PILE HEIGHT

Ca. 2.8 mm

TOTAL HEIGHT

Ca. 6 mm

TUFT DENSITY

Ca. 140 000/m²

PILE DENSITY

Ca. 0.125 g/cm³

CLASSIFICATION

EN 1307

33 - LC1

CASTOR CHAIR SUITABILITY

EN 985

A: intensive use

STAIR SUITABILITY

EN 1963

A: intensive use

PERMANENTLY ANTISTATIC

ISO 6356

< 2 kV

IMPACT NOISE RATING

ISO 140-8

24 dB ΔLw

SOUND ABSORPTION

ISO 354

0.15 αw

THERMAL RESISTANCE

ISO 8302

0.073 m² K/W

FASTNESS TO LIGHT

ISO 105-B02

≥ 7

COLOUR FASTNESS TO WATER

EN ISO 105-E01

≥ 4-5

RUBBING FASTNESS

EN ISO 105-X12

≥ 4

FIRE RESISTANCE

EN 13501-1

Cfl-s1

NUMBER OF COLOURS

10


WIDTH

EN ISO 3018

ca. 400 cm



Suitable for Allergic Persons
Wall to wall carpet of allergen-tested material
3.2-2384/05



EN14041



REG. NR
C42EE342
www.pro-dis.info



EN14041



19
Balta Industries - Kanegem-
straat 15 - BE 8700 Tielt
DOP: 1011#IEOACL
Textile Floor Covering EN1307
Notified body 2401

www.baltamediabank.com



e-grid


3/ *e-grid*

Combining tip-sheared texture with a fascinating pattern, *e-grid* blends the classic and contemporary. With a velvet-look that's Class 33 Heavy Commercial certified, *e-grid* brings luxury to high-traffic areas. Go for durability, light-fastness and style with *e-grid*.

e-grid



e-grid 78

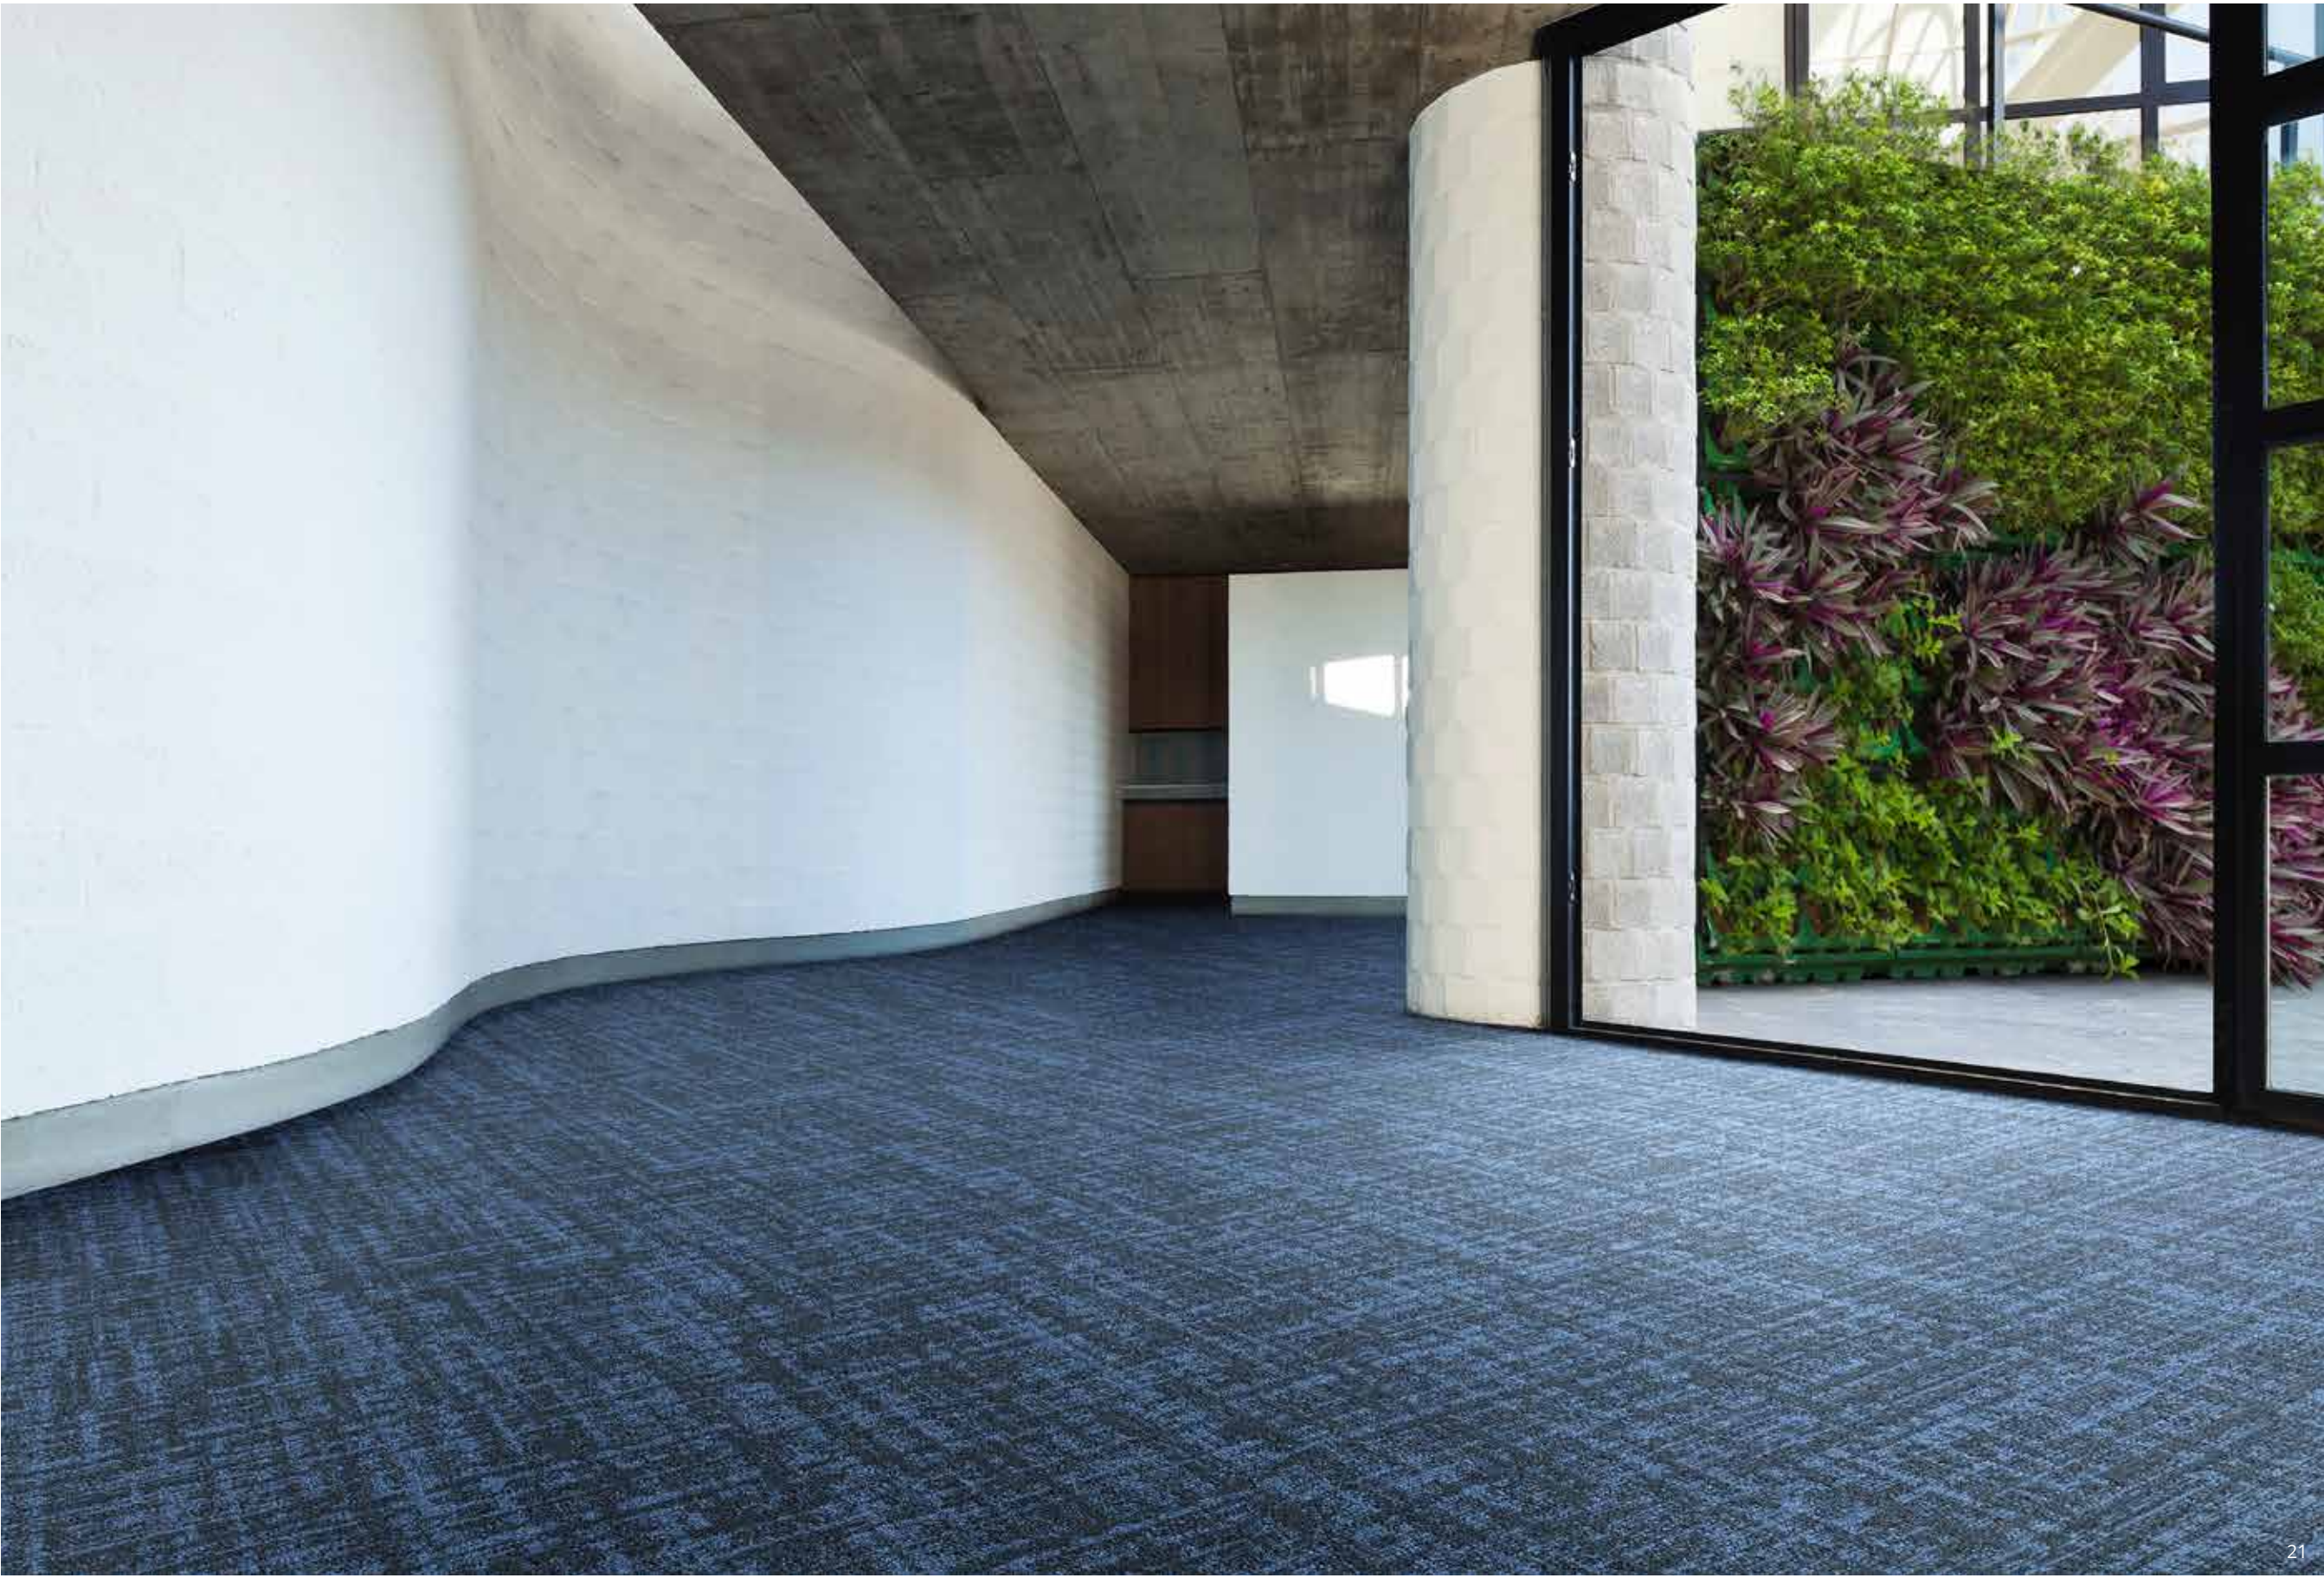

e-grid | COLOURS



e-grid 95



e-grid 98



e-grid 78



e-grid 93



e-grid 49

e-grid | TECHNICAL SPECIFICATIONS

CONSTRUCTION

Tufting 1/12" i-tuft

PILE MATERIAL

100% PA solution dyed

PRIMARY BACKING

Non woven

SECONDARY BACKING

Action Back

PILE WEIGHT

Ca. 780 gr/m²

TOTAL WEIGHT

2 100 gr/m²

PILE HEIGHT

Ca. 3.4 mm

TOTAL HEIGHT

Ca. 6.3 mm

TUFT DENSITY

Ca. 225 600/m²

PILE DENSITY

Ca. 0.143 g/cm³

CLASSIFICATION

EN 1307

33 - LC2

CASTOR CHAIR SUITABILITY

EN 985

A: intensive use

STAIR SUITABILITY

EN 1963

A: intensive use

PERMANENTLY ANTISTATIC

ISO 6356

< 2 kV

IMPACT NOISE RATING

ISO 140-8

26 dB ΔLw

SOUND ABSORPTION

ISO 354

0.20 αw

THERMAL RESISTANCE

ISO 8302

0.09 m²K/W

FASTNESS TO LIGHT

ISO 105-B02

≥ 7

COLOUR FASTNESS TO WATER

EN ISO 105-E01

≥ 4-5

RUBBING FASTNESS

EN ISO 105-X12

≥ 4

FIRE RESISTANCE

EN 13501-1

Cfl-s1


NUMBER OF COLOURS

5

WIDTH

EN ISO 3018

ca. 400 cm

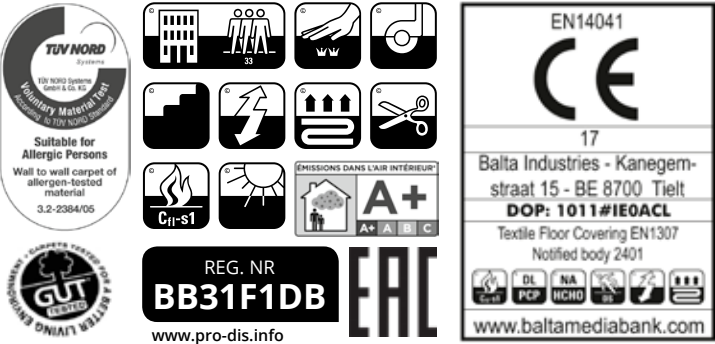

A photograph of a desert-themed indoor garden. In the foreground, several round, ribbed cacti with yellow spines sit on a bed of dark, porous rocks. To the left, a tall, columnar cactus with purple flowers stands vertically. In the center, a palm tree with long, thin fronds rises above the other plants. To the right, there are large, broad-leafed plants with yellow and green variegation. The background shows the glass and metal structure of a greenhouse or conservatory.

e-rock

4/ *e-rock*

Solid as a rock, this is a design that is sure to make a statement in any room. A tip-sheared texture brings a luxurious velvet surface that provides wonderful underfoot comfort and acoustic absorption. A modern, strong look that guarantees long-lasting colour.



e-rock 49

e-rock | COLOURS



e-rock 93




e-rock 95



e-rock 49



e-rock 78

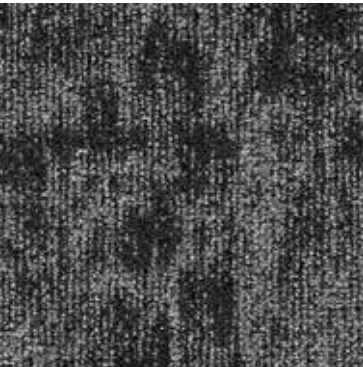

e-rock 98

e-rock | TECHNICAL SPECIFICATIONS

CONSTRUCTION

Tufting 1/12" i-tuft

PILE MATERIAL

100% PA solution dyed

PRIMARY BACKING

Non woven

SECONDARY BACKING

Action Back

PILE WEIGHT

Ca. 720 gr/m²

TOTAL WEIGHT

Ca. 2 250 gr/m²

PILE HEIGHT

Ca. 3.2 mm

TOTAL HEIGHT

Ca. 6.2 mm

TUFT DENSITY

Ca. 235 000/m²

PILE DENSITY

Ca. 0.140 g/cm³

CLASSIFICATION

EN 1307

33 - LC2

CASTOR CHAIR SUITABILITY

EN 985

A: intensive use

STAIR SUITABILITY

EN 1963

A: intensive use

PERMANENTLY ANTISTATIC

ISO 6356

< 2 kV

IMPACT NOISE RATING

ISO 140-8

24 dB ΔLw

SOUND ABSORPTION

ISO 354

0.20 αw

THERMAL RESISTANCE

ISO 8302

0.072 m² K/W

FASTNESS TO LIGHT

ISO 105-B02

≥ 7

COLOUR FASTNESS TO WATER

EN ISO 105-E01

≥ 4-5

RUBBING FASTNESS

EN ISO 105-X12

≥ 4

FIRE RESISTANCE

EN 13501-1

Cfl-s1

NUMBER OF COLOURS

5

WIDTH

EN ISO 3018

ca. 400 cm



Suitable for Allergic Persons
Wall to wall carpet of allergen-tested material
3.2-2384/05



GREEN LIVING





e-weave

5/ *e-weave*

Nature meets modernity in *e-weave*, possessing the collection's finest weave. This two-tone design displays a subtle elegance that never goes out of style. With a striking minimalist look, *e-weave* delivers impressive wear-resistance and durability.



e-weave 96

e-weave | COLOURS



e-weave 34




e-weave 93




e-weave 49



e-weave 99

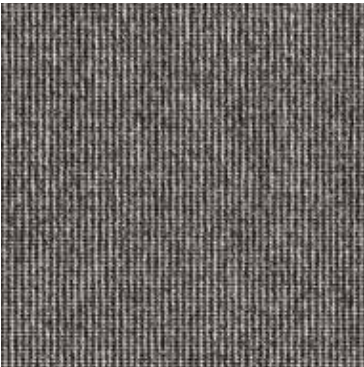

e-weave 96

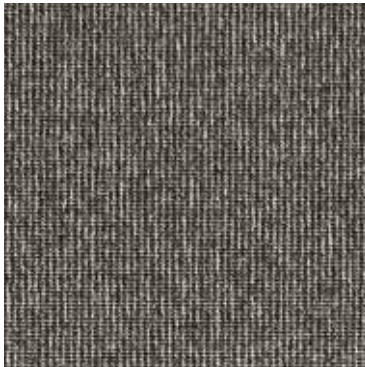

e-weave 98



e-weave 79



e-weave 78

e-weave | TECHNICAL SPECIFICATIONS

CONSTRUCTION

Tufting 5/64" minituft

PILE MATERIAL

100% PA solution dyed

PRIMARY BACKING

Non woven PES

SECONDARY BACKING

Action Back

PILE WEIGHT

Ca. 500 gr/m²

TOTAL WEIGHT

Ca. 2 095 gr/m²

PILE HEIGHT

Ca. 1.1 mm

TOTAL HEIGHT

Ca. 5.1 mm

TUFT DENSITY

Ca. 200 000/m²

PILE DENSITY

Ca. 0.156 g/cm³

CLASSIFICATION

EN 1307

33 - LC1

CASTOR CHAIR SUITABILITY

EN 985

A: intensive use

STAIR SUITABILITY

EN 1963

A: intensive use

PERMANENTLY ANTISTATIC

ISO 6356

< 2 kV

IMPACT NOISE RATING

ISO 140-8

18 dB ΔLw

SOUND ABSORPTION

ISO 354

0.15 αw

THERMAL RESISTANCE

ISO 8302

0.05 m² K/W

FASTNESS TO LIGHT

ISO 105-B02

≥ 7

COLOUR FASTNESS TO WATER

EN ISO 105-E01

≥ 4-5

RUBBING FASTNESS

EN ISO 105-X12

≥ 4

FIRE RESISTANCE

N 13501-1

Cfl-s1 (if glued)


NUMBER OF COLOURS

6

WIDTH

EN ISO 3018

ca. 400 cm

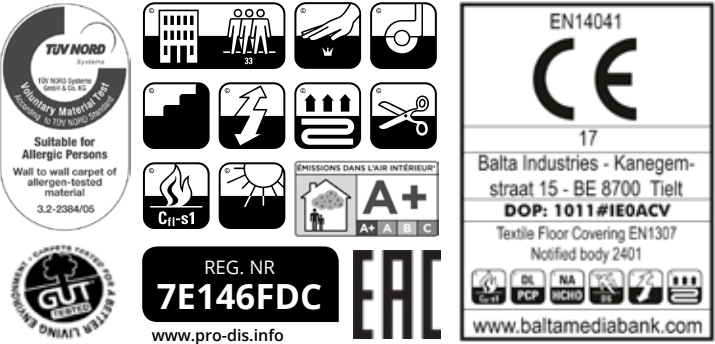


A photograph of a lush indoor garden. A curved, light-colored path leads through dense green foliage. In the background, long, thin strands of moss or hanging plants cascade down, creating a soft, ethereal atmosphere. The lighting is soft and natural, highlighting the textures of the plants.

e-touch


6/ *e-touch*

Enjoy the sublime comfort of *e-touch*'s luxurious quality. Soft underfoot, *e-touch* offers excellent acoustic absorption and a sumptuous feel. Impressively quiet and with supreme performance, *e-touch* is a win-win in any commercial space.

e-touch



e-touch 94

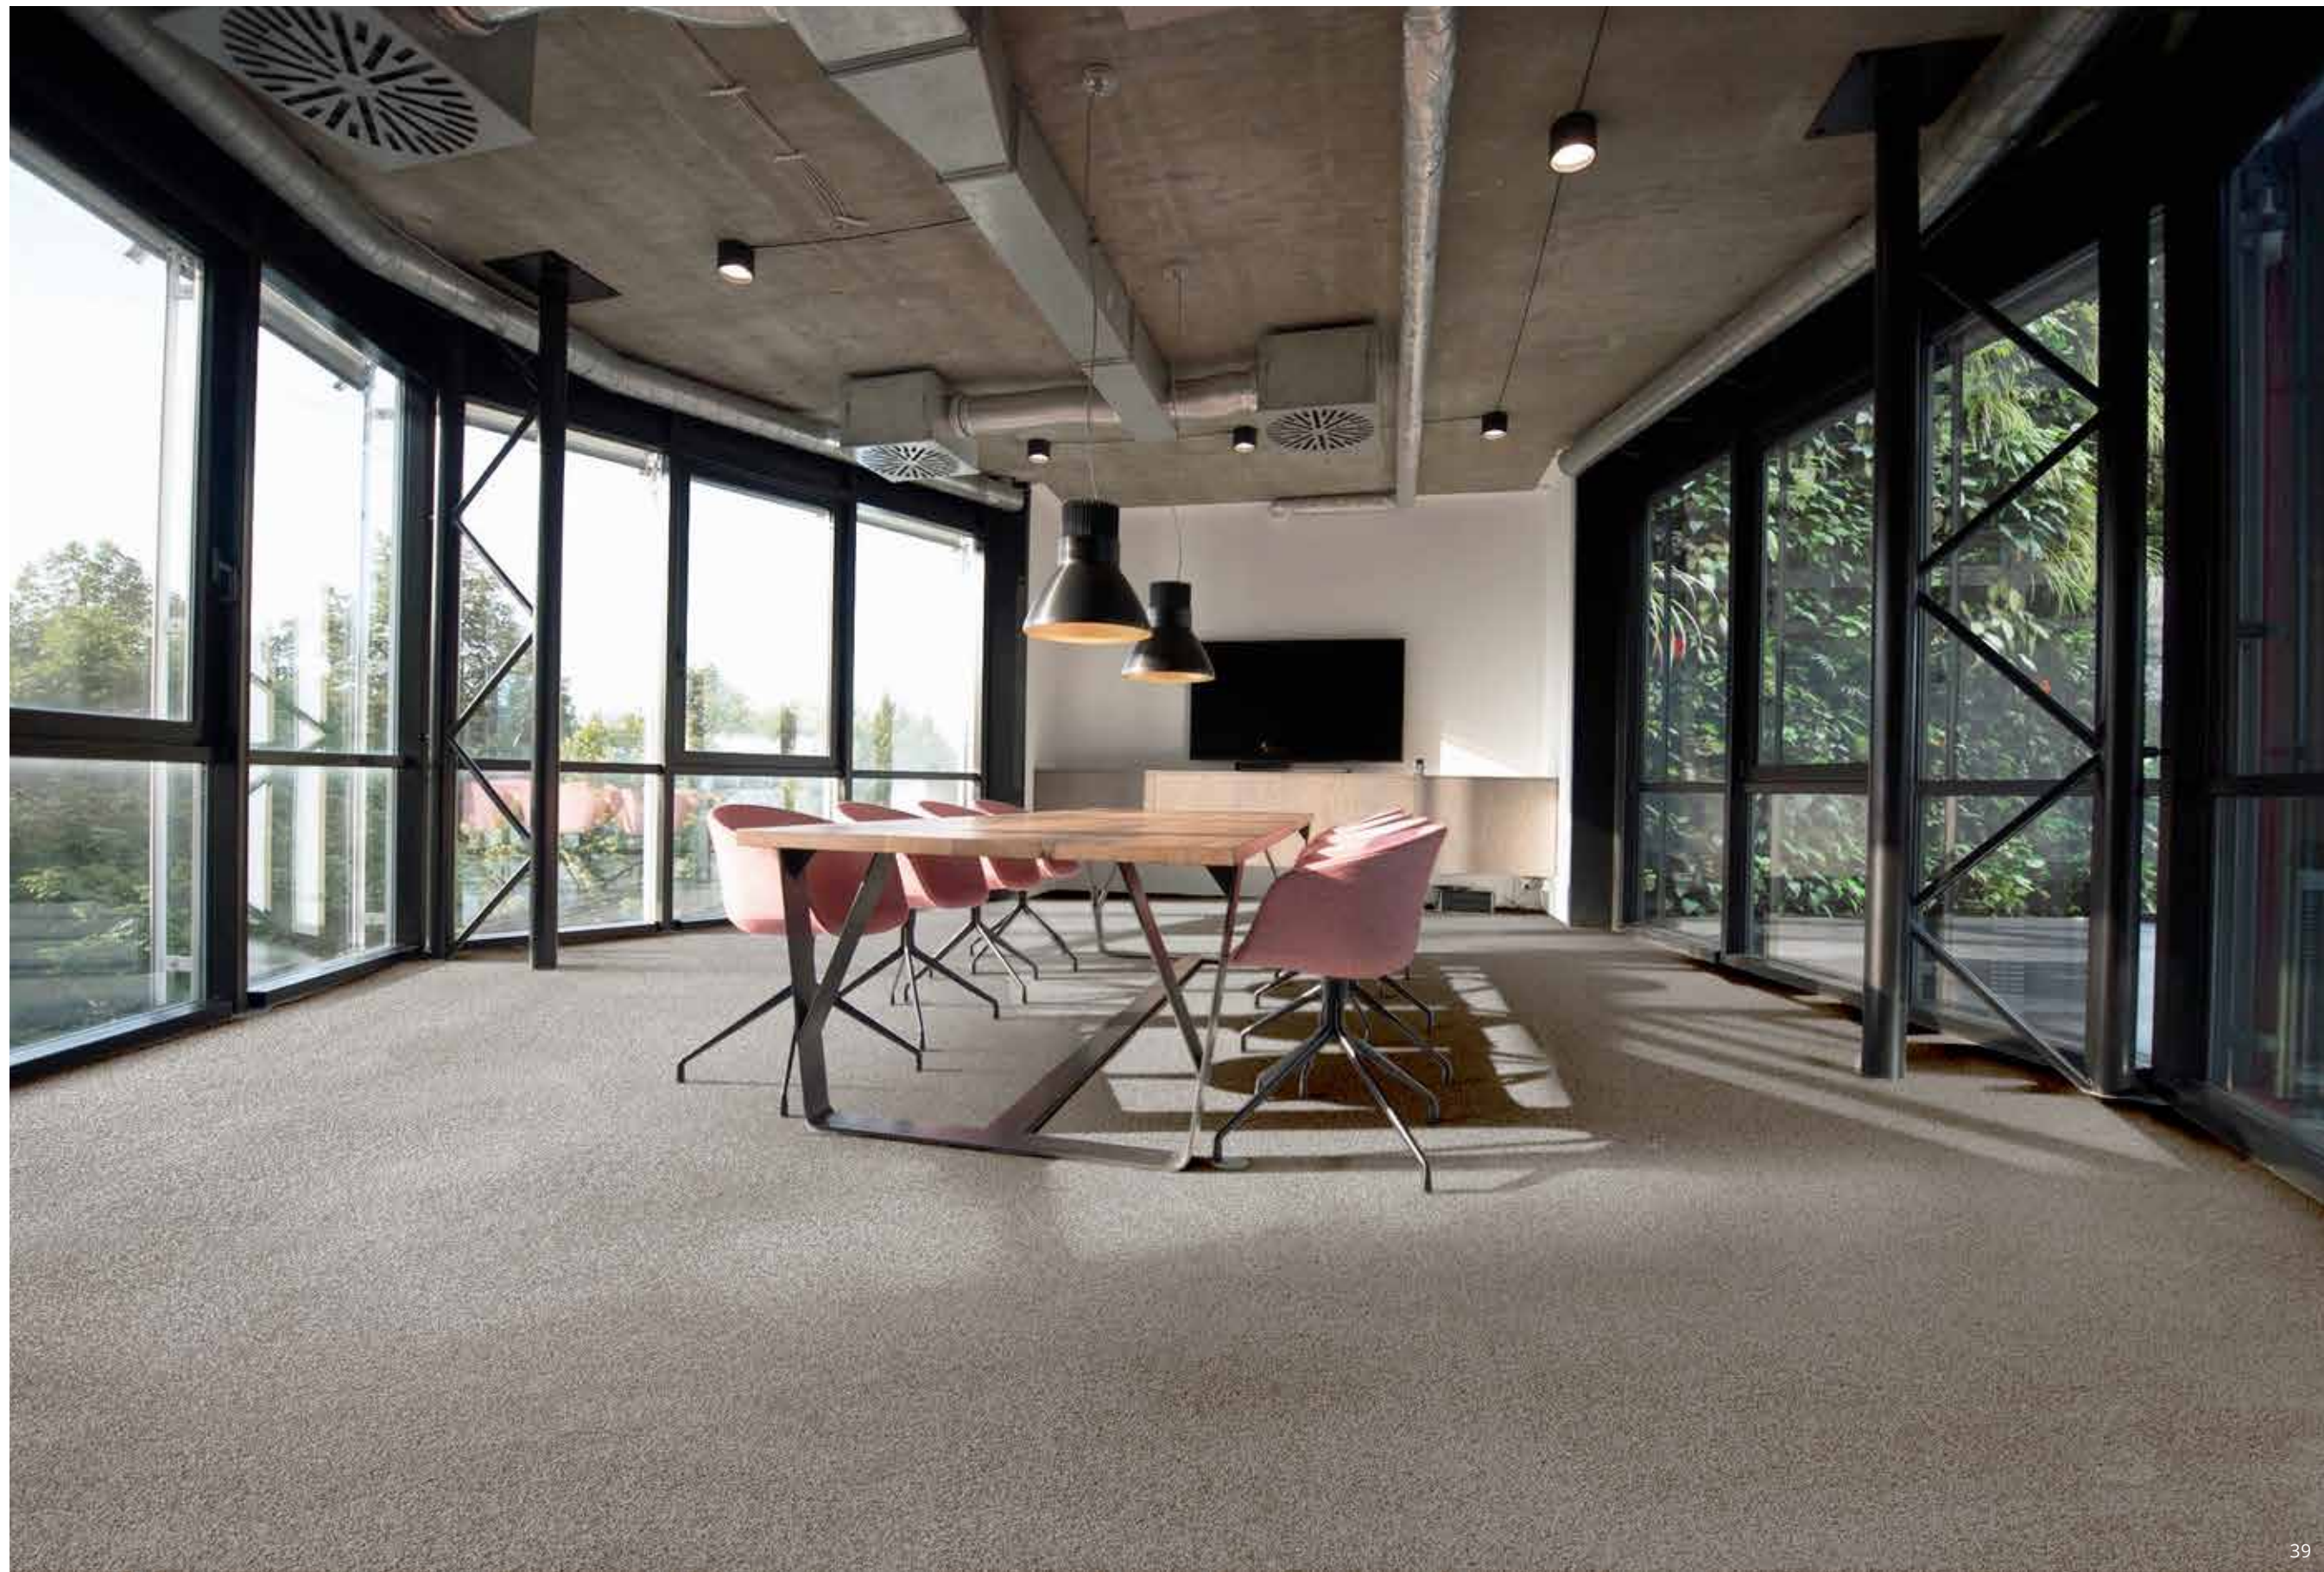

e-touch | COLOURS




e-touch 33




e-touch 34




e-touch 63

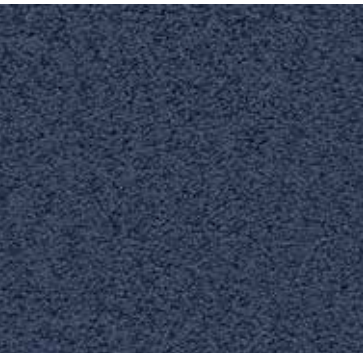


e-touch 77

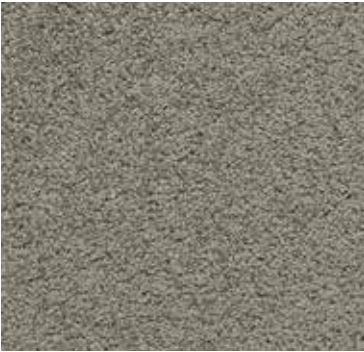

e-touch 93

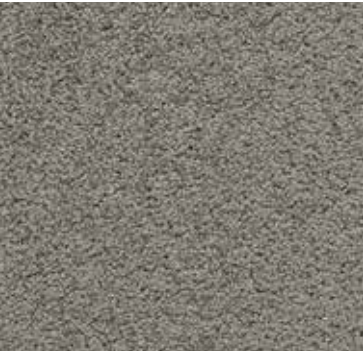


e-touch 94

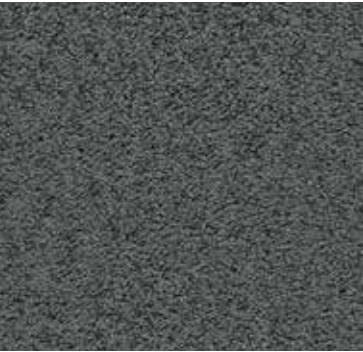

e-touch 98




e-touch 99

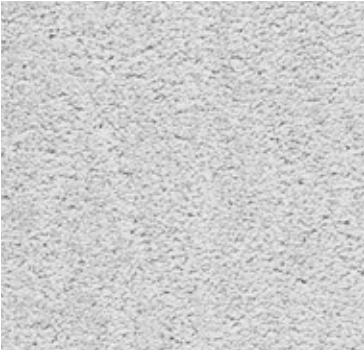

e-touch 190



e-touch 96

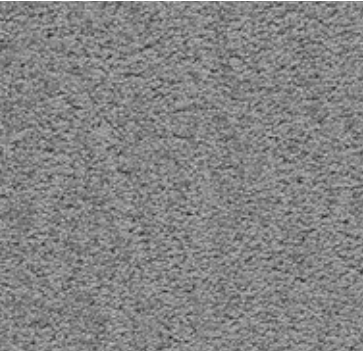

e-touch 95



e-touch 97



e-touch 90

e-touch | TECHNICAL SPECIFICATIONS

CONSTRUCTION
Tufting 1/8" saxony frisé

PILE MATERIAL
100% PA Solution Dyed

PRIMARY BACKING
Non woven PES

SECONDARY BACKING
Action Back

PILE WEIGHT
Ca. 1 575 gr/m²

TOTAL WEIGHT
Ca. 2 405 gr/m²

PILE HEIGHT
Ca. 15 mm

TOTAL HEIGHT
Ca. 18 mm

TUFT DENSITY
Ca. 195 000/m²

PILE DENSITY
Ca. 0.132 g/cm³

CLASSIFICATION
EN 1307
32 - LC5

CASTOR CHAIR SUITABILITY
EN 985
B: occasional use

STAIR SUITABILITY
EN 1963
B: occasional use

PERMANENTLY ANTISTATIC
ISO 6356
< 2 kV

IMPACT NOISE RATING
ISO 140-8
27 dB ΔLw

SOUND ABSORPTION
ISO 354
0.25 αw

THERMAL RESISTANCE
ISO 8302
0,188 m² K/W

FASTNESS TO LIGHT
ISO 105-B02
≥ 7

COLOUR FASTNESS TO WATER
EN ISO 105-E01
≥ 4-5

RUBBING FASTNESS
EN ISO 105-X12
≥ 4

FIRE RESISTANCE
EN 13501-1
Cfl-s1

NUMBER OF COLOURS
13

WIDTH
EN ISO 3018
ca. 400 cm

Suitable for Allergic Persons
Wall to wall carpet of allergen-tested material
3.2-2384/05

REG. NR
554FB3D8

www.pro-dis.info

EN14041

CE

18

Balta Industries - Kanegem-
straat 15 - BE 8700 Tielt
DOP: 1011#IEOACL

Textile Floor Covering EN1307
Notified body 2401


www.baltamediabank.com



Is e-ssential your natural choice?
Let's talk!

INFO@ARCEDITION.COM

Balta Industries nv
Kanegemstraat 15 - B-8700 Tielt - Belgium
T +32 (0)51 42 44 11 - F +32 (0)51 42 44 85
info@arcedition.com - www.arcedition.com

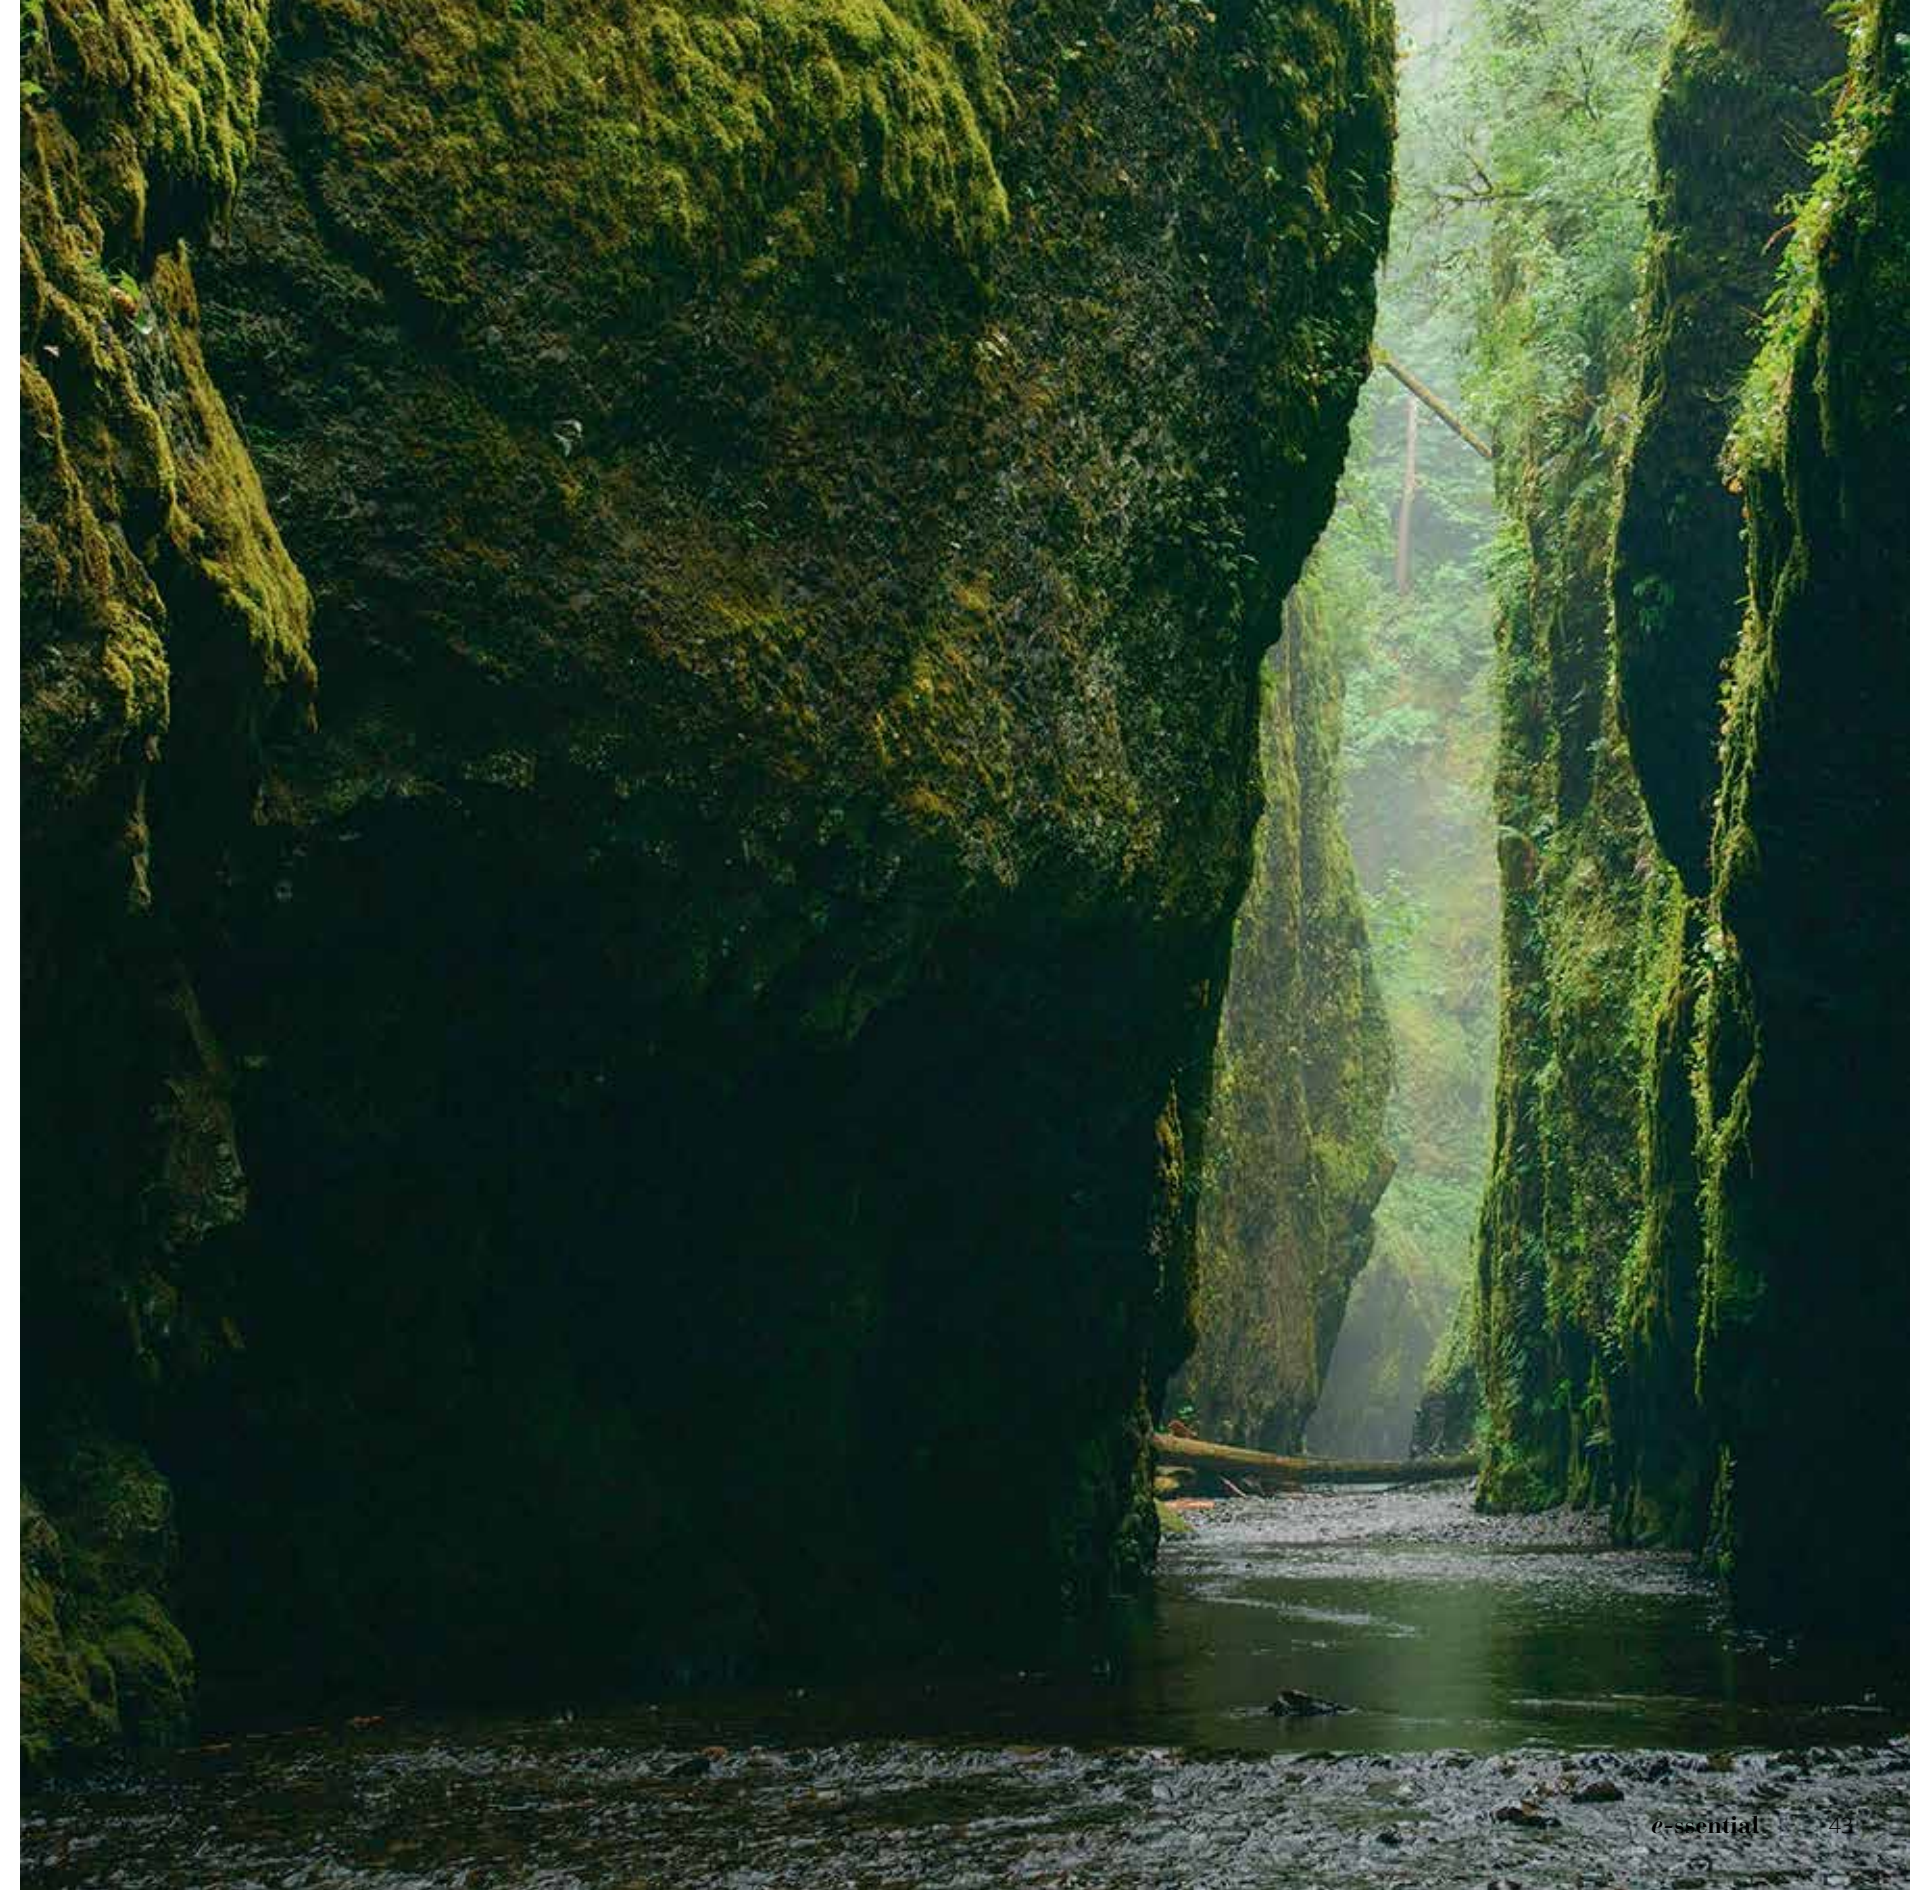

www.arcedition.com

 arc edition®